

Features

- High-flow thermostatic mixing valve
- Mechanically controlled thermostatic mixing valve maintains outlet temperature throughout shower experience
- Up to 50 lpm (13.3 gpm) flow rate at 3.1 bar (45 psi) with maximum flow of 39.5 lpm (10.5 gpm) from one outlet
- G 3/4 female inlet connections
- G 1/2 female outlets
- Antiscald protection
- Integrated adjustable high-temperature limit stop to control maximum water temperature
- Adjustable comfort setting (preset at approximately 37°C)

**Material**

- Cast dezincification-resistant brass body provides long term reliability and resistance to aggressive water conditions

Codes/Standards

ASME A112.18.1/CSA B125.1

Installation




- Requires three-outlet thermostatic valve control panel trim with recessed push buttons (sold separately)
- Fully-serviceable from the front of the valve

KOHLER® India Faucet Limited**Warranty**

See website for detailed warranty information.

KOHLER® Faucets

Anthem™
Three-port recessed mechanical thermostatic valve
K-26341IN

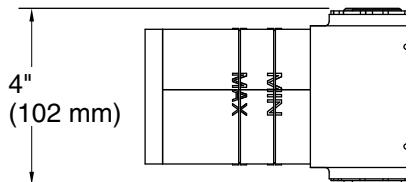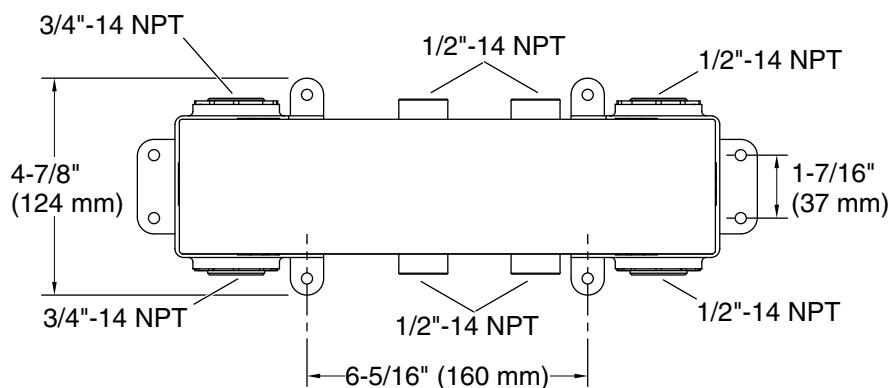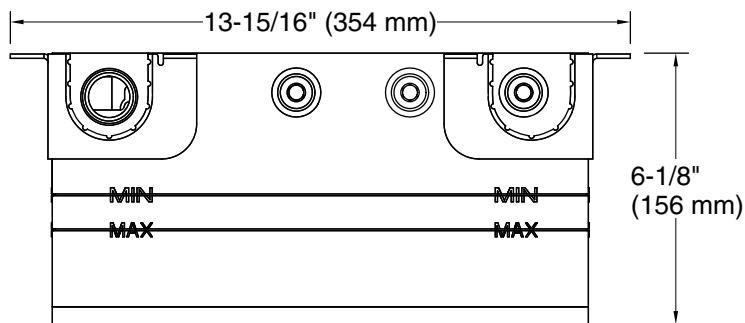

Technical Information

All product dimensions are nominal.

Customer Care: 1800 103 2244 (Toll Free)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to <http://www.kohler.co.in>.

5-13-2025 20:05 - IN

THE BOLD LOOK
OF **KOHLER**®